



VIDEO AMPLIFIER MODULE 5340-1000

APPLICATION



- This module use with the Video Amplifier for increased signal amplification and quality.

FEATURES

- Easily be installed with nut screwed. Just tighten the nut to the port of the splitter and the installation is completed.
- Available in Metal and Plastic Bracket.

TRANSMISSION PERFORMANCE

Forward Transmission	
Frequency Range(MHz)	54-1000
Rated Gain(dB)	10
Flatness in Band(dB)	±1.0
Noise Figure(dB) Min.	5.0
Return Loss(dB) Min.	16
Rated Input Level(dB uV)	85
Rated Output Level(dB uV)	75
Reverse Transmission	
Frequency Range(MHz)	5-42
Rated Gain(dB)	0 & 10
Rated Gain(dB)	±0.5
Return Loss(dB) Min.	16
Power Voltage	DC12V

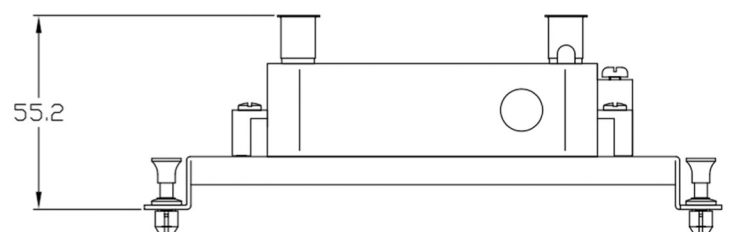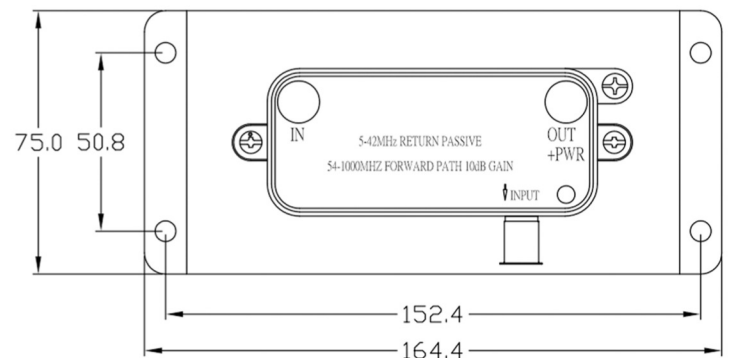

PHYSICAL SPECIFICATIONS

- UL 1863 safety listed.
- Bracket : Cold Rolled Steel.
- Dimensions : 164.4mm(W) x 75.0mm(H) x 55.2mm(D).
- Revit pitch : 152.4mm(W), 50.8mm(H).