


TELEPHONE INPUT DISTRIBUTION MODULE 5160P-12

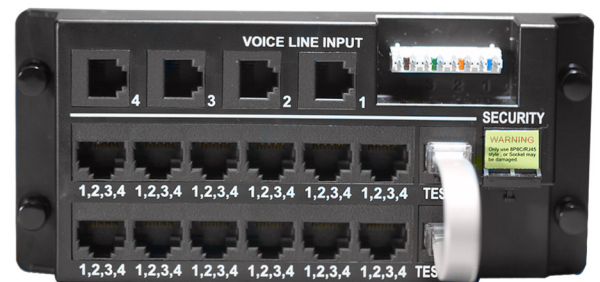

APPLICATION

- Accepts input of 4 individual phone lines at 4-pair connecting block or RJ11 (6P4C) jack. Distribute any of the twelve RJ45 output jacks. RJ31X jacks provide security interface to accommodate alarm systems.

FEATURES

- Easily be installed with finger-actuated latches. Just click the latches in to the holes on the back of the box and the installation is completed.
- Silkscreened port numbers on module front for easy reading.

ELECTRICAL SPECIFICATIONS

- Electrical Insulation Resistance : 500 MΩmin. @ 100V D.C.
- Dielectric Withstanding Voltage : 1000V D.C. or A.C. Peak Contact to Contact @ 60Hz for 1 minute.
- IDC Contact Resistance : 2.5 mΩ Max.
- Spring Wire Contact Resistance : 20 mΩ Max.
- Current Rating : 1.5 AMPS @ 20° C.

MECHANICAL SPECIFICATIONS

- Insertion / Extraction Life : 750 Cycles Minimum.
- IDC Terminal Insertion Cycles : 200 Min.
- Insertion / Pullout Force : 30 LBS 1Min. Between The Jack And Plug.
- IDC Wire Gauge : 22 ~ 24 AWG.

PHYSICAL SPECIFICATIONS

- UL 1863 safety listed.
- UL 94V-0 fire retardant plastic.
- Housing : High-Impact, Flame-Retardant Plastic, UL 94V-0.
- Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold.
- IDC : Phosphor Bronze Alloy With 100 micro-inch 100% Sn Alloy.
- Bracket : ABS plastic.
- Dimensions : 164.4mm(W) x 75.0mm(H) x 36.1mm(D).
- Revit pitch : 152.4mm(W), 38.1mm(H).

